

## Icarus U 1500 Prisma CCT DALI

### Beskrivelse

Produktnavn: Icarus U 1500 Prisma CCT DALI  
Elnr: 33 822 86  
EAN: 7090030944491

### Tekniske Data

|                   |                     |
|-------------------|---------------------|
| UGR:              | <19                 |
| RA (CRI):         | >80                 |
| MacAdam:          | 3                   |
| Optikk:           | Prismatisk          |
| L80/B50:          | 100.000 t i 25° C   |
| Spenning:         | 240V                |
| Tilkobling:       | 5-pol koblingstykke |
| Forkobling:       | TCI                 |
| Kan lysreguleres: | Ja, DALI            |
| IP-grad:          | IP20                |
| Materiale:        | Aluminium           |
| Farge:            | Hvit (RAL9016)      |
| Vekt:             | 4,2 kg              |

### CCT

| Fargetemperatur: | 3000 K   | 3500 K   | 4000 K   |
|------------------|----------|----------|----------|
| Effekt / Watt:   | 38 W     | 38 W     | 38 W     |
| Lumen (lm):      | 5024 lm  | 5171 lm  | 5107 lm  |
| Lumen per Watt:  | 132 lm/W | 136 lm/W | 134 lm/W |

### Mål

|                  |        |
|------------------|--------|
| Lengde:          | 1500mm |
| Høyde LED panel: | 66mm   |
| Bredde:          | 160mm  |



### Antall armaturer per kurs

|                 |          |
|-----------------|----------|
| B10             | 10       |
| B16             | 15       |
| C10             | 18       |
| C16             | 25       |
| Lekkasje strøm: | < 400 µA |

### BREEAM

|                 |     |
|-----------------|-----|
| BREEAM godkjent | Ja* |
| Flimmerfri:     | Ja* |

\*I henhold til BREEAM-NOR 2016 for nybygg, Teknisk manual SD5075NOR - Ver: 1.2 og "Faktaark 07 - LED og flimmer" fra Lyskultur

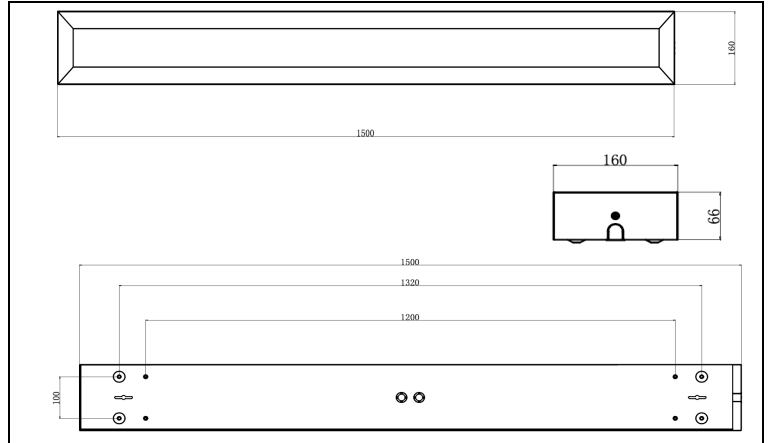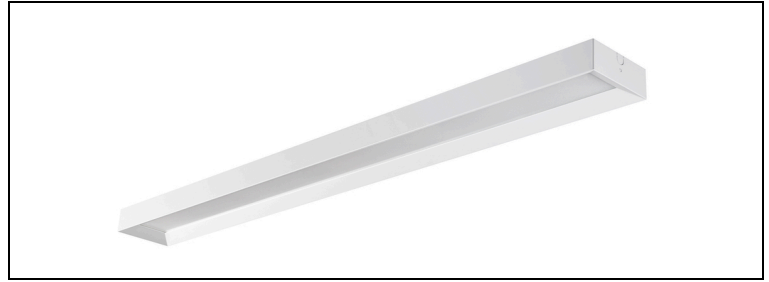

Denne lysarmaturen har innebygde LED-lamper.

Lampene i denne lysarmaturen kan ikke byttes ut.

LED

sebra light Icarus U Prisma CCT 874/2012

